
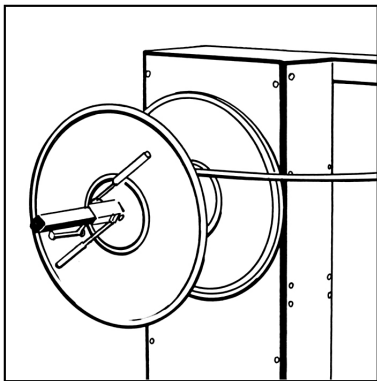


# W2/AC

## Winding machine

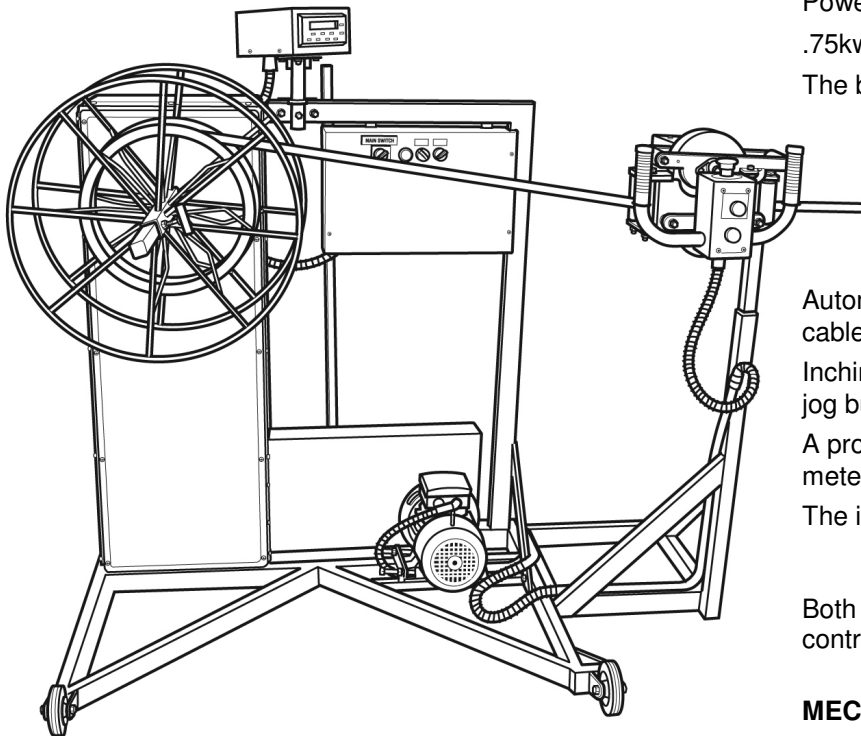

Power supply required 240V.10A A.C.  
.75kw brake motor with inverter speed control.  
The brake motor arrests over run at the end of the count.

A programmable metric electronic counter, which also allows for the winder to be recalibrated.

A slow down speed operates 10 metres before the end of a preset cable length (adjustable).

Automatic switch-off of the winder at the end of a preset cable length.

Inching can be achieved by using the forward reverse jog button.

A proximity switch is built into the handgrip of the meterhead for operator safety (dead man switch).

The inverter has 2 winding speed ranges:  
Setting 1 for the coiling cage & larger drums.  
Setting 2 for small reels.

Both speed ranges are fully variable with the speed control knob.

### MECHANICAL FEATURES

A coiling cage and drum winding attachment is supplied.

Two coiling cages sizes 800mm diameter or 600mm diameter can be ordered.

This winder is designed to run parallel to cable racking.

Wheels, one pivoting are fitted to the base frame to assist in moving the winder.

### ELECTRICAL PROTECTION

Main supply circuit breaker.

Control wiring circuit breaker.

Inverter has inbuilt protection.

One emergency stop button on the meterhead.

### DRUM CAPACITY

Maximum size: Diameter 600mm x width 400mm.

Maximum loading: 100kg.

### WINDER DIMENSIONS & WEIGHT

Length	Width	Height	Weight
1800mm	800mm	1520mm	150kg

## WINDING AND MEASURING EQUIPMENT

35 Playford Crescent, Salisbury North, South Australia 5108  
Telephone +61 8 8258 1724 • Fax +61 8 8258 9560 • info@starroll.com • www.starroll.com